



MP Antenna, LTD.
147 Eady Court
Elyria, Ohio 44035

440.387.5968 phone
440.545.3500 fax
www.mpantenna.com
sales@mpantenna.com

Part Number: MP0930-4X-HD

product description: RuggedWave Impact Resistant Dual Band Omni Antenna



Electrical Data

frequency range: 2 - 3GHz, 4.9 - 6GHz	environmental
gain: 6 dBi *	conditions: Outdoor
vswr: <1.2:1	operation temperature: -40 to 85 deg C
horizontal pattern type: Omnidirectional	storage temperature: -40 to 85 deg C
vertical patter type: Hemispheric	transport temperature: -40 to 85 deg C
ground plane: Built-In	IP Rating: IP67
min ground plane: N/A	

Environmental Data

General Data

color: Black	length: 5.5 in
antenna feeds: Four	width: 5.5 in
coax length: N/A	radome height: 1.83 in
coax type: N/A	total height: 1.83 in
connector type: N-Female	mounting type: Surface Mount
polarization: Multi-Polarized	hardware included: Nuts and Washers
power: 50 Watts Input	
impedance: 50 ohms nominal	
construction: Impact Resistant Delrin	

Mechanical Data

*** With built in spatial and polarization diversity, performance in obstructed environments is greater than that of standard antennas with similar or higher laboratory gains.**

Description:

The MP0930-4X-HD is a low profile Multi-Polarized Surface Mount Omni Antenna designed for mobile Mining communications, and is made of impact resistant acetal Delrin. The exceptional effective hemispherical Multi-Polarized signal pattern provides unequalled wireless communication in "Real World" obstructed non-line-of-sight (NLOS) environments.



MP Antenna, LTD. 440.387.5968 phone
147 Eady Court 440.545.3500 fax
Elyria, Ohio 44035 www.mpantenna.com
sales@mpantenna.com


Part Number: MP0930-4X-HD

product description: RuggedWave Impact Resistant Dual Band Omni Antenna


Frequency: 2.4 - 2.5GHz

Peak Gain: 6dBi

ELEVATION

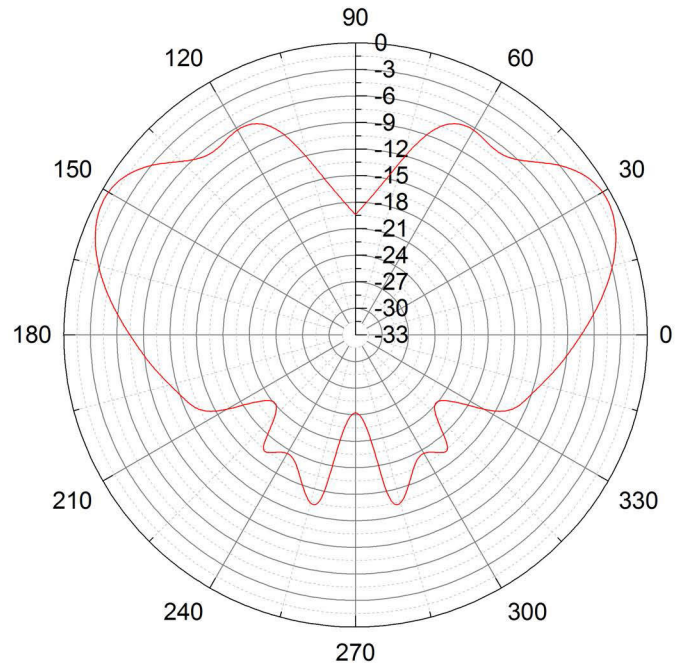

AZIMUTH

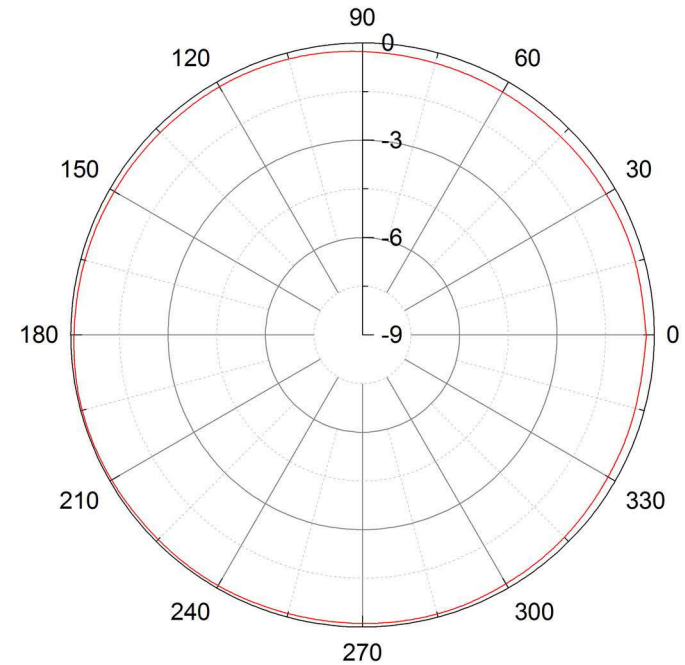



MP Antenna, LTD.
147 Eady Court
Elyria, Ohio 44035

440.387.5968 phone
440.545.3500 fax
www.mpantenna.com
sales@mpantenna.com


Part Number: MP0930-4X-HD

product description: RuggedWave Impact Resistant Dual Band Omni Antenna

Frequency: 4.9 - 6GHz

Peak Gain: 6dBi

ELEVATION

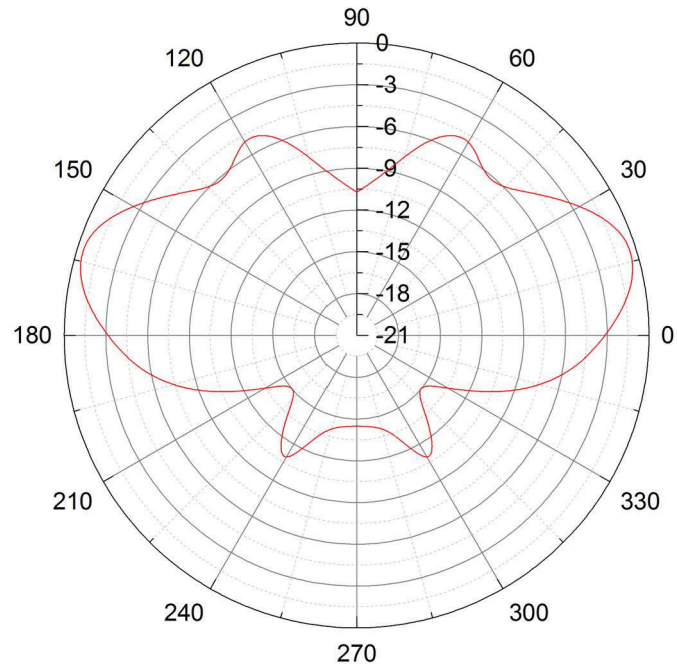

AZIMUTH

