

Part Number: 08-ANT-1100

model number: Various

product description: 2.4-2.5GHz and 5.15-6GHz Ground Plane Mount Omni

Antenna

## Electrical Data Environmental Data

frequency range:	2.4-2.5GHz, 5.15-6GHz	environmental cond.:	Outdoor
gain:	4dBi	operation temperature:	-40 to 85 deg C
vswr:	<1.5:1	storage temperature:	-40 to 85 deg C
horizontal pattern type:	Omni Directional	transport temperature:	-40 to 85 deg C
vertical patter type:	Hemispheric	IP Rating:	IP67
ground plane:	External Required	Rohs - Reach	Compliant
min ground plane:	4.0 in Recommended		

## General Data Mechanical Data

color:	Black or White	length:	1.0 in
antenna feeds:	One	width:	1.0 in
coax length:	Direct Connector or 1-15ft	height:	1.2 in
coax type:	200 Series	total height:	See Drawing
connector type:	Various *SMA Female	mounting type:	Thru Hole
	Shown	hardware included:	Nuts and Lockwasher
polarization:	Multi-Polarized		
power:	50 Watts Input	* With built in spatial and polarization diversity, performance in obstructed environments is greater than that of standard antennas with similar or higher laboratory gains.	
impedance:	50 ohms Nominal		
construction:	UV Stabilized ASA		

MP Antenna, LTD. 147 Eady Court Elyria, Ohio 44035

440.387.5968 phone 440.545.3500 fax www.mpantenna.com sales@mpantenna.com





Part Number: 08-ANT-1100


model number: Various

product description: 2.4-2.5GHz and 5.15-6GHz Ground Plane Mount Omni Antenna

Frequency: 2.4 GHz

Ground Plane Diameter: 4.0 in


Max Gain: 4dBi

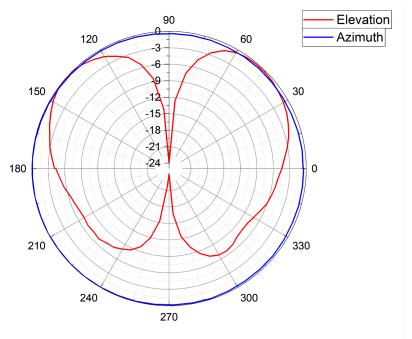

Frequency: 3.65 GHz

Ground Plane Diameter: 4.0 in

Gain: 4dBi

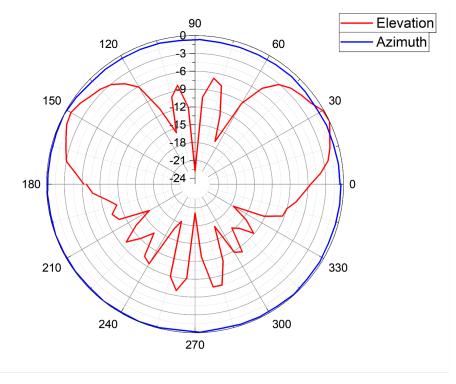



Part Number: 08-ANT-1100


model number: Various

product description: 2.4-2.5GHz and 5.15-6GHz Ground Plane Mount Omni Antenna

Frequency: 5.8 GHz

Ground Plane Diameter: 4.0 in

Max Gain: 4dBi

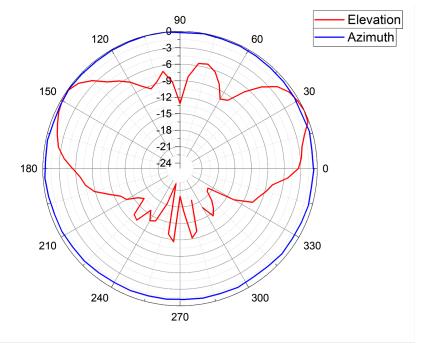

MP Antenna, LTD. 147 Eady Court Elyria, Ohio 44035

440.387.5968 phone 440.545.3500 fax www.mpantenna.com sales@mpantenna.com